
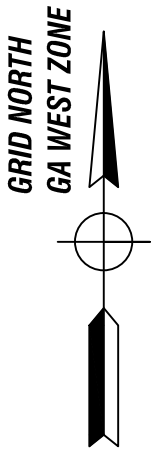


EXISTING LAKE WATER SURFACE
ELEVATION = 1100.6
ON MAY 3, 2016

GENERAL NOTES:

1. NORMAL POOL ELEVATION AT TIME OF SURVEY (MAY 3, 2016) = 1100.6.
2. APPROXIMATE LAKE SURFACE AREA AT NORMAL POOL = 15,111 SF (0.34 ACRES).
3. ESTIMATED SEDIMENT VOLUME TO BE REMOVED = 700 CY.
4. APPROXIMATELY 45% OF LAKE SURFACE AREA IS 4- FEET OF DEPTH OR LESS.

Elevations Table					
Number	Minimum Elevation	Maximum Elevation	Area	Color	Depth
1	1093.19	1094.60	1852 sf	Blue	6'-7.4'
2	1094.60	1095.60	3459 sf	Light Blue	5'-6'
3	1095.60	1096.60	2974 sf	Cyan	4'-5'
4	1096.60	1100.60	6880 sf	Red	0'-4'

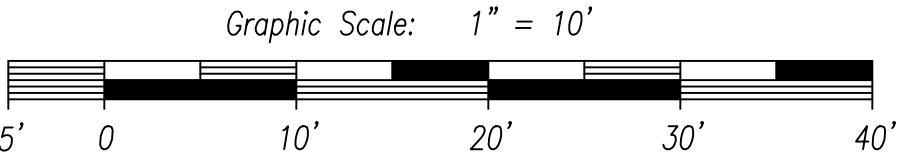

5074 BRISTOL INDUSTRIAL WAY
SUITE A
BUFORD, GEORGIA 30518
(770) 271-2868
www.dpengr.com

PREPARED FOR:
CITY OF JOHNS CREEK
12000 FINDLEY ROAD
SUITE 400
JOHNS CREEK, GA 30097

MR. ROBBY NEWTON
(678) 512-3239

PROJECT NAME:
**NEWTOWN PARK
LAKE DREDGING**

TASK:
**EXISTING LAKE
CONTOUR MAP
POST-SEDIMENT REMOVAL**

PROJECT INFORMATION:
NEWTOWN PARK DREDGING
Project Name
16-021
Project Number
BRUMBELOW RD./COUNTY PARK DR.
Project Address
Land Lot No.(s)
District
CITY OF JOHNS CREEK
FULTON COUNTY, GEORGIA
County, State

DATE								
REVISION								
No.	1	2	3	4	5	6	7	8
CBB DESIGN	AS SHOWN SCALE							
CBB DRAWN								
JCG CHECKED	SHEET							
05/11/16 DATE	16-021 PROJECT No.							